

SOME WORK CYCLE CHARACTERISTICS OF A  
SIMPLE, HIGH RATE, FORCED-PACE  
ASSEMBLY OPERATION

by

SANAT NATWARLAL PARIKH

D. M. E., Maharaja Sayajirao University of Baroda  
Baroda, India, 1955

D. E. E., Maharaja Sayajirao University of Baroda  
Baroda, India, 1956

---

A MASTER'S THESIS

submitted in partial fulfillment of the  
requirements for the degree

MASTER OF SCIENCE

Department of Industrial Engineering

KANSAS STATE UNIVERSITY  
Manhattan, Kansas

1962

LD  
2668  
T4  
1962  
P38

11

0,2

Documents.

## TABLE OF CONTENTS

INTRODUCTION.....	1
EXPERIMENTAL PROCEDURES.....	2
General Method.....	2
Equipment.....	2
The Experiment.....	7
Selection of Rates, Cycles, Operators and Groups....	12
Analytical Technique.....	15
ANALYSIS OF DATA.....	21
Over-all Analysis.....	21
$\bar{X}$ and R Charts.....	21
Analysis of Variance.....	26
Histograms.....	32
SUMMARY OF RESULTS.....	35
ACKNOWLEDGMENTS.....	46
REFERENCES.....	47
APPENDIX A.....	49
The Nature of Employment as Operators.....	50
Complete Setup of the Equipment.....	50
Summary of Analysis of Variance.....	50
APPENDIX B.....	54
Computer Program for Control Chart Limits.....	55

## INTRODUCTION

In the course of the last quarter century, many predetermined elemental time systems have been developed, which are designed to take place of the traditional time study method. As a result of this technique, many authors have written numerous articles regarding the validity as well as invalidity of the use of the standard time values for rating procedures. The main comment against these standard time values is that they vary too much and therefore will not provide the same results. So, it has been pointed out in many papers and articles that standard times are not reliable enough for practical purposes.

The supporters of the predetermined motion time techniques frequently describe them as an accurate system. They agree there is a slight variation between work cycles, but they argue that these variations are not large enough to hinder the establishment of a range of standard times for elemental motions.

Due to this conflict between authors, it was felt that a study of some of the characteristics of a specific type of assembly work might prove to be of some value. The type of assembly work chosen was that of a simple, high-rate, forced-pace assembly operation. Moving pictures were taken of this type of operation in order to obtain data to be used in the study.

## EXPERIMENTAL PROCEDURES

### General Method

The data used in this project were obtained from a micromotion film. With instruction from department personnel, the writer prepared the equipment required for this experiment and filmed a number of operators while they were assembling sets of specially designed parts, Fig. 1. This project was the third phase of a project begun as doctoral research performed at the University of Illinois (12).

The films were used to obtain data concerning the length of time spent by the operators in performing an assembly.

Statistical analysis of the data was done as explained later. From the findings of this data, and from the graphical examination, some useful conclusions were formulated.

Details of the equipment used, procedures followed, and other information is presented in the pages that follow.

### Equipment

The data were obtained by using 50 sets of simple brass parts. These parts were  $\frac{1}{8}$  in. thick and  $1 \frac{11}{16}$  in. in diameter, Fig. 1. The weight of an assembly of the three parts was approximately one pound. The film was taken when the operators were preparing the assembly of the three parts and disposing of it.

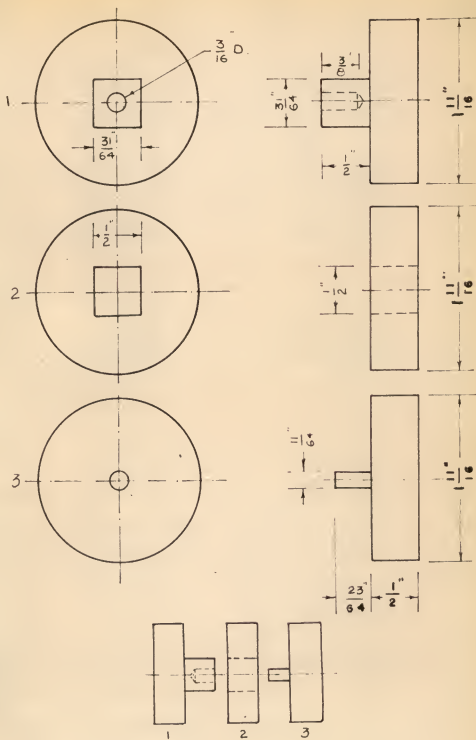


Fig. 1. Parts assembly.

A work surface was prepared at ordinary table height. Three chutes, each filled up with one type of the brass parts, supplied the parts to the work surface. Cycle starting switches, delivery chute, pacing device, and timer were also located on the work surface, Figs. 2 and 3.

In order to get a front view and top view simultaneously in each frame of film, a mirror was fixed above the work surface. The mirror was fixed in a separate frame and this frame was bolted to the main structure. Special provisions were made so that the mirror could be raised or lowered as required and the inclination could also be adjusted, if necessary.

The forced-pace mechanism consisted of a box-shaped obstruction, operated by a solenoid through a lever, Fig. 4. To avoid vibration and shock, the complete mechanism was mounted on a separate table which was located below the work surface. Only the box-shaped obstruction could come above the work surface.

The timer used to operate the solenoid was from the Eagle Signal Corporation. It could be set from 0 to 20 seconds at intervals of  $1/12$  of a second. It was set at different locations for the investigation.

The camera mount was made from steel tubes. The mount provided a means of controlling vertical movement, rotating movement, and also for leveling the camera in the horizontal plane, Fig. 5. The camera used for this project was a 16 mm.



Fig. 2. The work place as filmed.

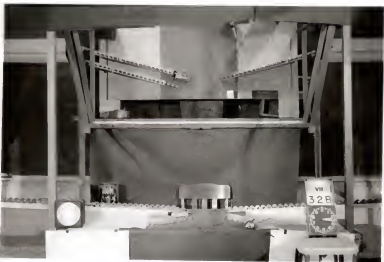


Fig. 3. Over-all view of apparatus.  
(curtains lifted upwards)





Fig. 4. Specially designed forced pacer.  
(shown in two positions)



Fig. 5. Camera and mount.



Bell and Howell - 70-TMR, operated at 32 frames per second and using a 10 mm. wide angle lens.

A continuous reading microchronometer was placed near the work surface, Figs. 2 and 3. This technique provided a method of determining time while analyzing the film.

The projector used for analyzing the film was a Bell and Howell projector with a hand crank, frame counter, and a 5/8 in. wide angle lens.

Two flood lamps each of 375 watts were used to provide sufficient light on the work surface while filming. A third lamp of the same type was used on the microchronometer. Temperature, humidity, and barometric pressure were noted for each operator setting as shown in Fig. 6. The chair used by the operator was an ordinary wooden chair without arms, Figs. 2 and 3.

### The Experiment

The data were produced by filming three sets of work cycles at three rates of production for 11 different operators. The rates set as goals were:

Rate A: 127/2000 minute per assembly  
Rate B: 110/2000 minute per assembly  
Rate C: 97/2000 minute per assembly

These times were taken from a phase of the experiment performed at the University of Nebraska during the school year of 1958-59. These were the mean times to prepare one complete assembly at the three different rates.

## FILMING RECORD FORM

Scene Number, Including Code VIII 06 A-C-B  
Rate Goal A.C.B  
Operator Code VIII  
Assistant Code -  
Operator Day (which of 3 runs) 1  
Day and Date Tuesday, February 13, 1962.  
Temperature 90  
Humidity 37%  
F Stop 3.5  
Frames Per Second 32  
Barometer 28.83

Fig. 6. An example of the standard form  
used to record filming data.  
(with typical data)

Then, the sum of mean times for the standard motions 7R, 8R, and delivery (See Table 1) were found from the same data and subtracted from the total time. The remaining time for each rate, known as "paced time", was as follows:


Rate A: 77/2000 minute  
Rate B: 70/2000 minute  
Rate C: 64/2000 minute

This was the most important part of this experiment. As the name of this experiment indicates, all operators were forced to grasp the third brass part to complete the assembly before the "paced time" was over. Whenever the operator missed the "paced time", he would not be able to finish that assembly. A specially designed force pacer was introduced in this experiment to prevent the operator from performing anymore work once the "paced time" elapsed. A complete electrical circuit of the pacer is shown in Fig. 7. As soon as the operator removed his finger tips from the two cycle starting switches, the timer started automatically. After the "paced time" elapsed, the energized solenoid lifted the box shaped obstruction into the up position so the third part could not be grasped by the operator.

This meant that for each rate, the operator was forced to grasp the third part before the respective "paced time" elapsed, otherwise, the third part was blocked by the pacer. When this happens, the assembly remains incomplete.

Table 1. Standard Motion Pattern

Right hand		Left hand	
Motion	Motion	Motion	Motion
Start	First finger over cycle starting button, light just out.	Start	First finger over cycle starting button.
1R	Transport Empty to end of motion, fingers over part 2.	1L	Transport Empty to end of motion, fingers over part 1.
2R	Grasp to point where part lifts clear	2L	Grasp to point where part lifts clear
3R	Transport Loaded until motion stops for assembly	3L	Transport Loaded until motion stops for assembly
4R	Assembly to point where right hand clears parts.	4L	Assembly to point where right hand clears parts
5R	Transport Empty to end of motion, fingers over part 3.	5L	Hold to contact of parts
6R	Grasp to point where part lifts clear		
7R	Transport Loaded until motion stops for assembly		
8R	Assembly to point where either hand clears.	6L	Assembly to point where either hand clears.
Del.	Delivery to point where assembly drops below work surface.	Del.	Delivery to point where assembly drops below work surface.



- N. C. - Normally closed micro switch
- N. O. - Normally open micro switch
- M. - Motor to run timer
- T. - Timer, Eagle Signal Corp.  
type-HG90A6 110 V. 60 cycles  
10 amps. max. cycle time 20 sec.
- S. - Solenoid for pacing device
- C. - Solenoid for breaking circuit  
Square D. Company. 110 V. 60 cycles

Fig. 7. Electrical circuit of the pacemaker.

Three rolls of 100 feet of film were used for each operator. Each roll consisted of all three rates, which were shot in random order. The order was determined from a table of random numbers, except for the first rate of the first roll, which was the slowest rate. For each filming, each operator was given some practice time.

#### Selection of Rates, Cycles, Operators, and Groups

Rate Selection. At the outset of this project, rate C alone was selected for analysis. The following was the reason for selecting rate C:

The data of rate C were more consistent. The other rates usually did not require as much effort by the operator to maintain the required pace. Rate C, however, was difficult to achieve and required a consistent effort by the operators at all times. While performing rates A and B, some of the operators needed to try harder to achieve the rate, whereas, to achieve rate C, an all out effort was required by all operators.

Cycle Selection. All complete cycles of rate C were used for the analysis, except those in which the operator made a serious positioning error or dropped one of the parts. It was obvious that if these cycles were included in the analysis, they would inject erroneous data into the results.

Operator Selection. During the experiment, eleven operators were recruited and data were collected for all. The data

of operator No. 8 had to be omitted from the study because he delivered the assembled parts alternatively with both hands.

Grouping Selection. The data obtained by analyzing rate C cycles were broken into four groups. The groups were chosen according to the length of time spent from the beginning of the assembly to the end of the delivery of the assembled parts.

Group I included all cycle times faster than the goal. This group had a time value range from 75/2000 minute to 87/2000 minute or a 13/2000 minute included cycle, Fig. 8.

Group II included all cycle times from 88/2000 minute to 100/2000 minute. This meant that this group also had the range of 13/2000 minute, Fig. 8.

Group III was also chosen with the same time value range. Thus, the values of this group ran from 101/2000 minute to 113/2000 minute, Fig. 8.

Group IV included all cycle time values greater than 114/2000. Above this cycle time value, observations were scattered and varied. The number of readings in this group was too small to compute a comparable analysis with the rest of the groups. Most of the points of this group were caused by some positioning error by the operators while assembling the parts.

Since these errors were not found in the other groups and since there was insufficient data in this group, the fourth group was omitted from the analysis.



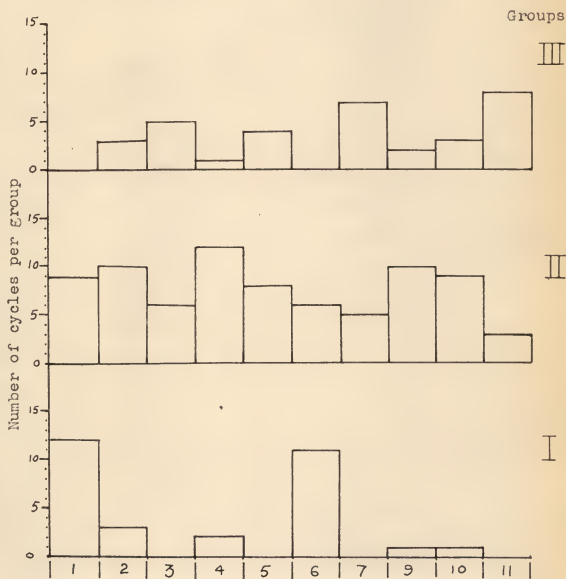


Fig. 8. Histogram: Number of cycles per operator per group.

### Analytical Technique

Over-all Film Analysis. The first step in the over-all analysis was to record the total time of all complete cycles of three different rates. As mentioned previously, in each roll of film, an operator was filmed at the three different rates and for each rate the data was recorded on a form as shown in Fig. 9.

A special coding was used while recording the observations. The scene number was noted in the ordinary way, such as, a code number, consisting of operator number, roll number, and rate. Location of this particular rate in the roll was designated by 1, 2, or 3. For example, if 2 was written in the blank, it meant that the location of the rate in this particular roll was in the middle portion of the roll. Similarly, 1 and 3 were noted for the first portion and last portion of the roll, respectively.

In the second and third column of the form, the readings of the microchronometer were recorded. Column four was calculated by finding the difference between the 2nd and 3rd column. The remark column was used to note the type of error committed during the cycle. If the cycle was acceptable, no comments were noted. E-1, E-2, etc. were the codes used to indicate the causes to reject the cycle. The last column was for some future investigation. A summary of these readings,

## CYCLE TIMES

Scene No. VI 22 C

Location 2

Sr. No.	1 Unit = 1/2000 Min.			Remark	Select or Reject
	Start	End	Cycle Time		
1	120	213	93		
2	282	382	100		
3	445	525	80		
4	605	697	92		
5	702	777	-	E-1	
6	858	935	77		
7	020	110	-	E-5	
8	205	285	-	E-1	
9	358	433	75		

Good Cycles	Sub Total	Film Ave.
6	517	86.17

Fig. 9. An example of the standard form used to record cycle time and film average with a typical set of values.

the number of good cycles, the total of all cycle time, and the average film time were noted in tabular form.

Detailed Film Analysis. After completing the over-all analysis of the film, a detailed film analysis for rate C was performed. The first step in this detailed analysis was to break the assembly cycle into the component motions to be studied. The same motions as those used in the previous study (12) were used in this study. The standard motion pattern used is shown in Table 1.

It may be noted from this table that the starting point of a cycle is indicated by a flashing light, which was obtained when the starting buttons were pushed simultaneously. The switches and light are shown in Figs. 2 and 3.

After the standard motion pattern was identified, all cycles of rate C were projected on a screen and the time for each component part was recorded. An example of the form and a set of typical cycle time values is shown in Fig. 10. The cycle number consisted of scene number and serial number, both as noted in Fig. 9. After recording the time for each component part and checking the total time with the one recorded previously, the group number for the cycle was noted.

Cycle Percentage Data. After recording the time values and component motions for each cycle, the component motions were converted into the percentage of their respective total cycle times. The percentage cycle times were also recorded in the motion pattern time data form, Fig. 10.

## MOTION PATTERN TIME DATA

Cycle No. II 09 C-8

Right Hand				Left Hand			
Motion	Begin	Req'd	Cycle%	Motion	Begin	Req'd	Cycle%
1	360			1	360		
2	369	9	9.47	2	371	11	11.57
3	379	10	10.52	3	380	9	9.47
4	388	9	9.47	4	388	8	8.42
5	407	19	19.99	5	407	19	---
6	411	4	4.21	6	421	14	---
7	414	3	3.16	7	448	27	---
8	421	7	7.36	8	454	6	7.36
9	448	27	28.40	9	455	1	
10	469	21	---	10	469	14	---

Cycle Time 95

Group No. II

Fig. 10. An example of the standard form used to record motion time values, cycle time, Group No. and cycle%. (with typical values).

There were two reasons for converting the absolute time values for the component motions into a percentage of the total cycle time;

1. This method allowed for a comparison, of the percentage values to the absolute values, to be made and thus gave a more complete study of the available data.

2. If absolute values would have been used when considering a component motion time value which varied between groups, it could be ascertained only that the component motion time values did vary between the groups. By using percentages, the variance could be tested first to see whether the percentage between groups was the same or if they still contained a significant variance. After performing this test, it could be determined if a particular component motion time value increased or decreased in proportion to the increase or decrease of the total cycle time for different groups.

After recording all data in the table, the forms were sorted according to the group classification. Then a final summary was prepared for each rate in each group. This was done by rearranging the percentage cycle time of each sheet. This gave the final summary of all rates separately. Then the time value average for each operator was calculated for each rate, Fig. 11.

# SUMMARY OF CYCLE PERCENTAGE DATA

Time 1R

Group II

Cycle No.	OPERATORS										
	#1	#2	#3	#4	#5	#6	#7	#9	#10	#11	
1	8.42	9.27	9.00	8.16	7.14	7.53	7.00	6.12	11.45	9.00	
2	7.14	10.10	8.60	8.89	7.78	5.00	6.31	6.18	8.42	8.00	
3	7.78	9.47	8.89	8.50	7.21	4.44	8.33	7.21	8.60	8.00	
4	7.29	9.47	9.00	9.27	8.24	5.68	8.33	6.25	8.98		
5	7.78	8.16	11.22	8.89	8.08	7.86	9.47	7.14	8.24		
6	7.21	10.30	9.09	8.50	7.36	5.56		8.00	7.36		
7	7.21	9.09		9.27	7.14			9.09	8.42		
8	7.78	8.08		8.98	6.12			8.16	8.24		
9	7.29	11.23		10.11				8.42	8.89		
10		10.98		9.00							
11				8.42							
12				9.09							
Average	7.54	9.61	9.30	8.92	7.38	6.01	7.88	7.48	8.73	8.33	

FIG. 11. An example of the standard form used to record the summary of the cycle percentage with a typical set of values.



## ANALYSIS OF DATA

## Over-all Analysis

The next step after recording all time values for all rates, was to prepare the summaries for the three rates. The number of good cycles, the total of all cycle times, and the average film time from each time data form was transferred to the respective summary sheets according to the rate classification. Then the final average film averages were calculated by dividing the total of all cycle times by the total number of good cycles. This was the method used to calculate the three final average film times.

A table was prepared showing allowable time and actual mean time of this project for each rate. The percentage change (drop or rise) was calculated as shown in Table 2.

 $\bar{X}$  and R Charts

After completing the tables of the summary of the cycle percentage data, one of the first phases of the analysis was to determine whether the operators were performing the various motions of the assembly cycle in a similar and homogeneous pattern.

One of the methods of checking homogeneity regarding the data is by means of constructing  $\bar{X}$  and R charts. A control

Table 2. Summary of the cycle times.

Rate	Total Given Time	Overall Average Cycle Time (Calculated)	Difference in Time	% Decrease or Increase in Given Time
A	127 Units	106.64	20.36	18.65% Decrease
B	110 Units	100.23	9.77	8.88% Decrease
C	97 Units	97.23	.23	.23% Increase

chart is a statistical device used principally for the study and control of repetitive processes, such as the operation performed in this project.

The component motion percentage of total time as recorded in Fig. 10 was defined as the  $X$  values. Similarly, the difference between the largest and smallest  $X$  value per operator, which was called the range,  $R$ , was calculated. The points plotted on the  $\bar{X}$  chart and  $R$  chart were the  $\bar{X}$  values and  $R$  values.

According to the standard procedure of the statistical methods, it was necessary to determine the control limits for both types of charts. This complete data was recorded on a control chart data form as shown in Fig. 12. The upper and lower limits for the control charts were set at plus and minus three standard deviations. This gave 99.7% surety that any point that fell out of control had an assignable cause. In this case it could be said that a lack of homogeneity appeared among the operators.

CONTROL CHART DATA							
Time 1R				Group III			
Value	OPERATORS						
	#2	#3	#5	#7	#9	#10	#11
n	3.000	5.000	4.000	7.000	2.000	3.000	8.000
$\bar{X}$	8.950	9.350	6.500	7.350	6.670	6.840	8.210
R	4.000	4.980	2.470	1.100	1.910	1.940	5.710
$d_2$	1.693	2.326	2.059	2.704	1.128	1.163	2.847
$R/d_2$	2.364	2.141	1.200	0.407	1.694	1.147	2.004
$D_2$	4.358	4.918	4.698	5.203	3.686	4.358	5.307
$D_1$	0.000	0.000	0.000	0.205	0.000	0.000	0.387
$D_2 \sigma X'$	6.820	7.700	7.350	8.140	5.770	6.820	8.310
$D_1 \sigma X'$	0.000	0.000	0.000	0.320	0.000	0.000	0.610
A	1.732	1.342	1.500	1.134	2.121	1.732	1.061
$A \sigma X'$	2.710	2.100	2.350	1.770	3.320	2.710	1.660
$\bar{\bar{X}} + A \sigma X'$	10.530	9.920	10.170	9.590	11.140	10.530	9.480
$\bar{\bar{X}} - A \sigma X'$	5.110	5.720	5.470	6.050	4.500	5.110	6.160

$$\bar{\bar{X}} = \frac{\sum X}{N} = 7.820$$

$$\sigma X' = \Sigma(R/d_2) / n = 1.565$$

$$UCL_{\bar{X}} = \bar{\bar{X}} + A \sigma X' \qquad UCL_R = D_2 \sigma X'$$

$$LCL_{\bar{X}} = \bar{\bar{X}} - A \sigma X' \qquad LCL_R = D_1 \sigma X'$$

Fig. 12. An example of the standard form used to record the control chart data with a typical set of values.

The method of obtaining the limits for the control chart is used by A. J. Duncan (4) and recorded in the forms as follows:

Row 1:  $n$ , the number of observations per operator.

Row 2:  $\bar{X}$ , the average percentage per operator.

Row 3:  $R$ , the range of  $X$  values of operator.

Row 4:  $d_2$ , constant from Duncan, page 886.

Row 5:  $R/d_2$ , calculated.

Row 6:  $D_2$ , constant from Duncan, page 886.

Row 7:  $D_1$ , constant from Duncan, page 886.

Row 8:  $D_2 \sigma X'$ , calculated, UCL for  $R$  chart.

Row 9:  $D_1 \sigma X'$ , calculated, LCL for  $R$  chart.

Row 10:  $A$ , constant from Duncan, page 886.

Row 11:  $A \sigma X'$ , calculated.

Row 12:  $\bar{X} + A \sigma X'$ , calculated, UCL for  $\bar{X}$  chart.

Row 13:  $\bar{X} - A \sigma X'$ , calculated, LCL for  $\bar{X}$  chart.

For completion of the calculation, it was necessary to compute  $\bar{X}$  and  $\sigma X'$  for each data form. The procedure for this calculation has been noted on the data form.

Most of this computation seemed to be repetitive and similar in procedure, so, a computer program was written in SOAP and the IBM 650 Computer was used for the calculations. The complete program is shown in Appendix B.

It was found from the printed output of the accounting machine (IBM 402) that 31 points fell outside the control limits of  $\bar{X}$  chart and  $R$  chart. This led to an immediate

question of whether any one operator or any one motion within a certain group contained more points out of control than the other operators or motions. So, to discover an answer to this question, Tables 3 and 4 were constructed.

### Analysis of Variance

One of the most powerful tools of statistical analysis is the analysis of variance. Basically, it consists of classifying and cross-classifying the data and testing whether the means of a specified classification differ significantly.

In this project, it was desired to know whether the percentages of total cycle time for each motion varied significantly from group to group and from operator to operator. Thus, this was the two-way classification analysis of variance, for operators and groups.

A table was prepared for one motion time data and it was realized that in some of the cells of the table there were no data. This happened because of the different characteristics used to prepare the assembly by different operators. So, to analyze the data for the analysis of variance it was necessary to divide the data into two parts.

In the first part there were four operators and three groups, Fig. 13, while in the second part, there were four operators and two groups, Fig. 14.

Table 3. Summary of points outside the control limits from the  $\bar{X}$  and R Charts comparing operators against Groups.

Oper. No.	Groups						Sub Total	Total	
	I		II		III				
	$\bar{X}$ &R: 5		$\bar{X}$ &R: 20		$\bar{X}$ &R: 6		31	31	
	X:5	R:0	X:17	R:3	X:5	R:1	X:27	R:4	
	H L	H L	H L	H L	H L	H L	H L	H L	
	5 0	0 0	8 9	3 0	4 1	1 0	17 10	4 0	
1			1 1	1			1 1	1	3
2	4		2	1	2		8	1	9
3			1 1		1		1 2		3
4	1		1 1				2 1		3
5			1				1		1
6			1 2				1 2		3
7						1		1	1
9	1		1				1 1		2
10			1 2				1 2		3
11			1	1	1		2	1	3

H - is a point that fell above the upper control limit.

L - is a point that fell below the lower control limit.



Table 4. Summary of points outside the control limits from the  $\bar{X}$  and R Charts comparing motions against groups.

Mot- ions.	Groups								Sub Total	Total
	I		II		III					
	$\bar{X}$ &R: 5		$\bar{X}$ &R: 20		$\bar{X}$ &R: 6		31		31	
	X:5	R:0	X:17	R:3	X:5	R:1	X:27	R:4		
	H L	H L	H L	H L	H L	H L	H L	H L		
	5 0	0 0	8 9	3 0	4 1	1 0	17 10	4 0		
1R	2		1 1				3 1		4	
2R	1		1 2	1	1		3 2	1	6	
3R				1		1		2	2	
4R			1				1		1	
5R						1		1	1	
6R									0	
7R			1				1		1	
8R									0	
1L	1		1 2				2 2		4	
2L	1		2 2		1		4 2		6	
3L					1		1		1	
Del.			1 2	1	1		2 2	1	5	

## ANALYSIS OF VARIANCE

Time 1R

Oper.	Groups			$\bar{X}_1$
	I	II	III	
2	9.68	9.61	8.95	28.24
4	10.29	8.92	7.62	26.83
8	7.22	7.48	6.67	21.37
9	8.04	8.73	6.87	23.64
$\bar{X}_j$	35.23	34.74	30.11	100.08

$$(1) \Sigma (\Sigma \bar{X}_1)^2 / 3 = 2352.87/3 = 844.29$$

$$(2) \Sigma (\Sigma \bar{X}_j)^2 / 4 = 3554.63/4 = 838.66$$

$$(3) \Sigma (\bar{X}_{1j})^2 = 850.29$$

$$(4) (\Sigma \bar{X}_{1j})^2 / 12 = 10016.01/12 = 834.67$$

$$(5) (1)-(4) = 9.62$$

$$(6) (2)-(4) = 3.99$$

$$(7) (8)-(5)-(6) = 2.01$$

$$(8) (3)-(4) = 15.62$$

Source of Variation	Sum of Squares	D.F.	Mean Square	Variance Ratio
Operators	9.62	3	3.21	9.44*
Groups	3.99	2	2.00	5.88*
Residuals	2.01	6	0.34	

Fig. 13. An example of the standard Form No. 1 used to record computations of analysis of variance with typical values.

## ANALYSIS OF VARIANCE

Time 1R

Oper.	Groups		$\bar{X}_i$
	II	III	
3	9.30	9.35	18.65
5	7.38	6.50	13.88
7	7.88	7.35	15.23
10	8.33	8.21	16.54
$\bar{X}_j$	32.89	31.41	64.30

$$(1) \quad \Sigma (\Sigma \bar{X}_i)^2 / 2 = 1046.00/2 = 523.00$$

$$(2) \quad \Sigma (\Sigma \bar{X}_j)^2 / 4 = 2068.34/4 = 517.09$$

$$(3) \quad \Sigma (\bar{X}_{ij})^2 = 523.54$$

$$(4) \quad (\Sigma \bar{X}_{ij})^2 / 8 = 4134.49/8 = 516.81$$

$$(5) \quad (1)-(4) = 6.19$$

$$(6) \quad (2)-(4) = 0.28$$

$$(7) \quad (8)-(5)-(6) = 0.26$$

$$(8) \quad (3)-(4) = 6.73$$

Source of Variation	Sum of Squares	D.F.	Mean Square	Variance Ratio
Operators	6.19	3	2.06	22.89*
Groups	0.28	1	0.28	3.11
Residuals	0.26	3	0.09	

Fig. 14. An example of the standard Form No. 2 used to record computations of analysis of variance with typical values.

The method, used to compute the analysis of variance for these data, was to find the mean squares for the operators and groups, and compare the variance ratios to the critical  $F_{0.05}$  and  $F_{0.01}$  values found in the table of "Percentage Point of the F-Distribution", such as may be found in Duncan (4).

For the first part of the data, the computational procedure was as follows:

- (1) A table of the cycle percentage averages per operator per group was constructed as shown in Fig. 13.
- (2) The  $\Sigma \bar{X}_i$  and  $\Sigma \bar{X}_j$  were computed for the rows and columns respectively.
- (3) Complete computation of the sum of squares was done as shown in the eight steps in the form, Fig. 13.
- (4) The next step was to determine the degrees of freedom.
  - (a) For the operator, the number of degrees of freedom was one less than the number of rows or three degrees of freedom.
  - (b) Similarly for groups, the number of degrees of freedom was two.
  - (c) The residual degrees of freedom was equal to the operator's degrees of freedom, times the group's degrees of freedom, or six degrees of freedom.
- (5) The mean squares were computed by dividing the sum of squares by the respective degrees of freedom.

(6) The mean squares of the operators and the groups were divided by the mean squares of residuals and these two ratios, known as variance ratios, were tabulated in the last column of Fig. 13.

(7) The critical variance ratio,  $F$ , was determined for the operators for  $n_1 = 3$  degrees of freedom,  $n_2 = 6$  degrees of freedom at the 5% and 1% level of significance. It was also determined for the groups at 2 and 6 degrees of freedom at both significance levels.

(8) The last step was the comparison. The variance ratios found in step 6 were compared, for both operators and groups, with the critical variance ratios derived in step 7 at both the 5% and 1% levels of significance. If the variance ratios were larger than the critical variance ratio values, the source of variations (either operators or groups) were significant sources of variation at the level of significance tested. Variance ratios that are significant at the 0.05 level are starred. Those significant at the 0.01 level are double starred.

A summary of the analysis of variance for all twelve motions is shown in Tables 5 and 6.

### Histograms

For the graphical analysis two histograms were constructed. The main purpose of these two histograms was to compare

Table 5. The summary of analysis of variance according to the types of motions for Form No. 1.

Motion	Comparison of	Significant Variance ?		Motion Type
		5%	1%	
1R	Operators Groups	Yes Yes	No No	Reach
2R	Operators Groups	Yes No	Yes No	Grasp
3R	Operators Groups	No No	No No	Return
4R	Operators Groups	No No	No No	Assembly
5R	Operators Groups	Yes Yes	No No	Reach
6R	Operators Groups	No No	No No	Grasp
7R	Operators Groups	No No	No No	Return
8R	Operators Groups	No Yes	No Yes	Assembly
1L	Operators Groups	Yes No	Yes No	Reach
2L	Operators Groups	Yes No	Yes No	Grasp
3L	Operators Groups	Yes No	No No	Return
Del.	Operators Groups	Yes Yes	Yes Yes	Delivery

Table 6. The summary of analysis of variance according to the types of motions for Form No. 2.

Motion	Comparison of	Significant Variance ?		Motion Type
		5%	1%	
1R	Operators Groups	Yes No	No No	Reach
2R	Operators Groups	No No	No No	Grasp
3R	Operators Groups	No No	No No	Return
4R	Operators Groups	Yes Yes	Yes No	Assembly
5R	Operators Groups	Yes Yes	Yes No	Reach
6R	Operators Groups	No No	No No	Grasp
7R	Operators Groups	No No	No No	Return
8R	Operators Groups	Yes Yes	No No	Assembly
1L	Operators Groups	Yes No	No No	Reach
2L	Operators Groups	Yes No	No No	Grasp
3L	Operators Groups	No Yes	No No	Return
Del.	Operators Groups	No No	No No	Delivery



graphically the amount of time needed, and the percentage of total cycle time needed to complete a component of motion for the three groups. The histograms constructed appear in Figs. 15 and 16. These two histograms permitted a complete comparison of increases and decreases in time from group to group for all component motions to be made.

As the percentages of total cycle time were plotted for both hands on the same histogram, the summation of the within-group percentage did not total 100%. The same thing was true for the motion time histogram. If motions 1R through "delivery" were plotted, they would total 100%. Similarly, if all left hand motions were plotted, they would also total 100%.

#### SUMMARY OF RESULTS

An examination of Table 2 provides some interesting aspects of the characteristics of the work cycles at different rates. It could be pointed out from Table 2 that in the slower rates, the mean of total cycle time dropped considerably, while the cycle time for rate C remains constant.

This indicates that at the slower rates, A and B, even though the operator had more time to complete the assembly he tried to work faster because of the forced-pace device. Once the operator had started in such an environment, he could not adjust his speed in the last few operations where there were no restrictions.


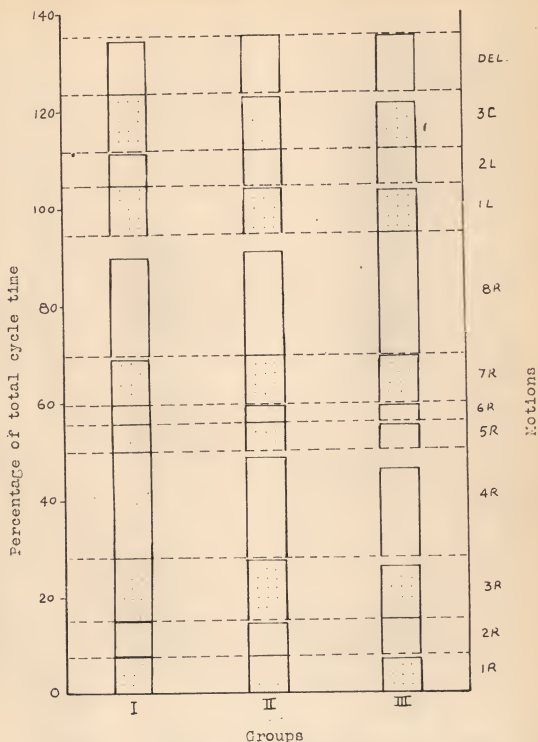


Fig. 15. Histogram: Group comparison of time percentage per motion.

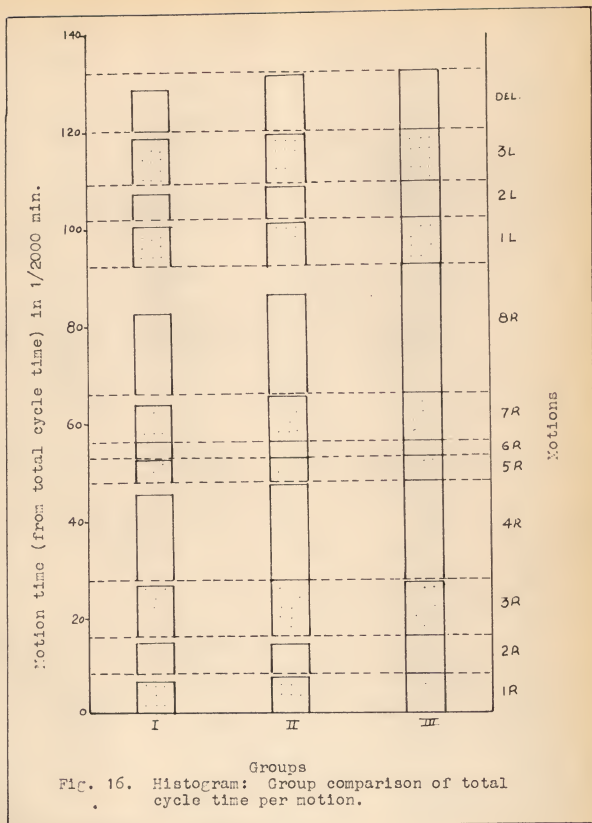

This may be a psychological effect or human nature that if the operator starts any operation, like an assembly job of this project at a high rate, he cannot slow down speed for some operations and again return to the original speed. In other words, it can be said that it is very difficult to perform some motions within the cycle at high rate and some motions at slow rate.

Out of the 504 points calculated for the control charts, 31 points fell outside the control limits. In other words, 6.15% of the total points were out of control. Out of these 31 points, 27 were  $\bar{X}$  chart points, while the remaining 4 were range chart points. The analysis of the data leads to the following remarks.

The percentage of total cycle time values of the operators definitely lacked in homogeneity between one another because too many points fell outside the control limits of  $\bar{X}$  charts. If the operators had been performing the assembly in a homogeneous manner, all points would have fallen within the control limits of  $\bar{X}$  charts.

Even though there were 27 points out of control on  $\bar{X}$  charts, there were only 4 points out of control on R charts and all of these points were above the upper control limit. Since there were 4 points out of control, it is obvious that there was variability, but as the number of points out of control on the R charts was few in comparison with the  $\bar{X}$  charts,

this provides a point that probably should be investigated further in a later study.

Even though a great deal of variation was present between operators, the time values of any particular motion of any operator were not found to be big or small with any regularity. In other words, it is safe to conclude that in any forced pace operation where the operators always need to try harder to achieve the rate, the time value of any motion would seldom be too big or small, even though variability was present.

As mentioned previously, Tables 3 and 4 were constructed in an attempt to check whether any one operator or any one motion within a group contained more points out of control than the other operators or motions.

Table 3 comparing operators against groups, shows a fairly even range of values of data that was analyzed. However, operator No. 2 had more points out of control than the trend of the others. For operator No. 2, all points of the  $\bar{X}$  chart which were out of control fell above the upper control limit. For the other operators there was no specific trend. It appears that each operator attained a certain level at which he was producing his percentage of total cycle time values and, in general, this level was different from the other operators.

Table 4, comparing motions against the groups, showed two motions with more points out of control than any other motions.

The motions out of control were 2R and 2L. This was an interesting point as both these motions were grasps that were performed simultaneously by the right and left hands. An explanation for this might be that the part being grasped was not picked up securely and the operator may have temporarily lost control of the part. Consequently, the operator had to regrasp it which caused a great deal of variability. These slips could happen because the two pieces were being picked up simultaneously by both hands. It was observed that while picking up two pieces, the operators looked directly at one piece even though both pieces were being picked up together. This often led to poor grasping of the piece which was not viewed. The explanation was backed by the fact that motion 6R, which is also a grasp by the right hand while the left hand simply holds the first two assembled parts, did not contain any points out of control.

Motions 1R and 1L also contained a large number of points which were out of control. The reason for this could be because of the different reaction time of the operators. In this motion, the operator had to press the two switches simultaneously and then start the cycle, so after pressing the switches, some of the operators were slightly slower to start the cycle which caused this variability.

While disposing of the complete assembly, some operators used a slightly different way which caused some of these points to fall outside the control limits.



Even though motions 4R and 8R were the assembly operations, they did not contain a significant number of points out of control. This was an interesting point, that these motions which were variable between groups and operators, were not variable within a group of given motions.

Tables 5 and 6 were condensed and tabulated, as shown in Table 7 and 8, according to the types of motions. The main purpose of condensing the summary was to check the characteristics of similar motions within the cycle.

A study of the four tables points out some specific trends followed during the motions. The percentage of the total cycle time spent on the reach motions from the different Tables 5 through 8, seemed to be a significant source of variation for the operators at the 5% level, but at 1%, there was no significant variation. There was a split in the significance at the 5% level and no significance at the 1% level for group to group comparison. This indicates that even though there was significant variance between the percentage values of the operators, there was very little variability between the percentage values of the operators.

Similarly, the percentages of the total cycle time spent on all other motions were studied. It was found that each motion had significant variance at the 5% level and little variability at the 1% level for the operator to operator comparison.



Table 7. A condensation of the summary of the analysis of variance according to the types of motions in Form No. 1.

Motion Type	Number of Motion Types	Comparison of	Significant Variance ?	
			5%	1%
Reach	3	Operators	Yes	Split
		Groups	Split	No
Return	3	Operators	Split	No
		Groups	No	No
Grasp	3	Operators	Split	Split
		Groups	No	No
Assembly	2	Operators	No	No
		Groups	Split	Split
Delivery	1	Operators	Yes	Yes
		Groups	Yes	Yes

Table 8. A condensation of the summary of the analysis of variance according to the types of motion in Form No. 2.

Motion Type	Number of Motion Types	Comparison of	Significant Variance ?	
			5%	1%
Reach	3	Operators	Yes	Split
		Groups	Split	No
Return	3	Operators	No	No
		Groups	Split	No
Grasp	3	Operators	Split	No
		Groups	No	No
Assembly	2	Operators	Yes	Split
		Groups	Yes	No
Delivery	1	Operators	No	No
		Groups	No	No

The amount of cycle time spent on the grasp showed no significant variance at either the 5% or the 1% levels for the group to group comparison. All other motions showed a split in the significant variance at the 5% and very little variability at 1% for the group to group comparison.

In other words, it could be said that the variability was present, randomly scattered, in all the motions of this assembly operation.

Some interesting relations were noted from Fig. 15, the "Group Comparison of Total Cycle Time per Motion" and Fig. 16, the "Group Comparison of Time Percentage per Motion".

It was a noticeable point that the assembly motions, 4R and 8R, took the greatest percentage of total cycle time and showed the greatest over-all change from Group 1 to Group 3. Even though the motion 4R was most variable from group to group, it was the most consistent with respect to its change from one group to another. The same was true for the less complex assembly motion 8R. It was clear from the histograms that nearly all of the increase in the total cycle time from Group 1 to Group 3 was because of these assembly operations.

When comparing the remaining motions, they showed nearly the same relative change from one group to another. However, the changes did not increase in proportion to the analysis of variance. These changes varied randomly from one group to the next. So, even though the change in percentage of total cycle

time taken by the motion was nearly the same when comparing the motions, it was still variable in its relative change when compared to the total cycle time change between groups.

## ACKNOWLEDGMENTS

The writer gratefully acknowledges the invaluable assistance rendered by the faculty and staff members in the Department of Industrial Engineering. In particular, the writer wishes to express his sincere gratitude to Dr. Irvin L. Reis, Head of the Department of Industrial Engineering, for suggestions and encouragement during the formulation and initial phases of the thesis. Further gratitude is due Professor Morris H. Schneider for the valuable counsel offered in the construction of the thesis. While they remain anonymous, the students and the shop personnel who gave their time to serve as operators, deserve a special thanks.

## REFERENCES

1. Bailey, G. B. and R. Presgrave  
Basic Motion Time Study. New York: McGraw Hill Book Co., 1958.
2. Barnes, R. M.  
Motion and Time Study. Fourth Ed., New York: John Wiley and Sons, 1958.
3. Buffa, E. S.  
"Pacing Effects in Production Lines", Journal of Industrial Engineering, Vol. 12, No. 6. November and December, 1961, pp. 383-386.
4. Duncan, A. J.  
Quality Control and Industrial Statistics, Rev. Ed. Homewood, Illinois: Richard Irwin, 1959.
5. Krick, E. V.  
"Hyperenthusiastic and Hypercritical Writings on Predetermined Motion Times", Journal of Industrial Engineering, Vol. 9, No. 3. May and June, 1958, pp. 158-161.
6. Maynard, H. B.  
(Ed.), Industrial Engineering Handbook, First Ed., New York: McGraw Hill Book Co., 1956.
7. Morrow, R. L.  
Motion Economy and Work Measurement, Second Ed., New York: The Ronald Press Co., 1957.
8. Moyer, J. W.  
A Study of the Variability of Work Cycles in a Simple, High-Rate, Machine-Paced Assembly Operation, Unpublished M. S. Thesis, University of Nebraska, Lincoln, Nebraska, January 1960.
9. Mundel, M. E.  
Motion and Time Study, Third Ed., New York: Prentice-Hall, 1960.
10. Niebel, E. W.  
Motion and Time Study, Rev. Ed., Homewood, Illinois: Richard Irwin, 1958.

## REFERENCES (concl.)

11. Presgrave, R.  
The Dynamics of Time Study, Second Ed., New York:  
McGraw Hill Book Co., 1945.
12. Reis, I. L.  
An Investigation of the Means by Which a Worker Achieves  
a Change in Production Rate in Simple, Operator-Faced  
Assembly Work, Unpublished Ph.D. Dissertation, University  
of Illinois, Urbana, Illinois, March, 1957.
13. Snedecor, G. W.  
Statistical Methods, Fifth Ed., The Iowa State College  
Press, Ames, Iowa, 1959.



## APPENDIX A

### The Nature of Employment as Operators

Eleven operators were employed for this project from the staff members, students, and workshop personnel. The time schedules were fixed at their convenience. Each operator was called four times, first time for dexterity test and remaining three times for filming. Each time it took nearly thirty minutes to finish the operation.

On the first call, a peg board test was given to each operator as a dexterity test, and then some practice on the work surface to give some idea what they were supposed to do.

Each time while filming an operator, 100 feet of film was used. The operator filled out a Personal Conditions Form as shown in Fig. 17. The purpose of this form was to check the general conditions of the operator while he was operating.

### Complete Setup of the Equipment

The work surface was fixed to the floor by bolts after leveling. The camera mount was also fixed in the position as shown in the schematic diagram, Fig. 18.

### Summary of Analysis of Variance

While doing calculations for analysis of variance, the data were divided into two parts as discussed in the thesis, and the separate summaries are presented in Tables 5 and 6. An attempt

## PERSONAL CONDITIONS FORM

Date \_\_\_\_\_

Hour \_\_\_\_\_

Personnel Code \_\_\_\_\_

Approximate hours of sleep last night \_\_\_\_\_

Have you any unusual personal worries at the moment? Yes \_\_\_ No \_\_\_

Check any of the following which may apply to you at this time

\_\_\_\_\_ Sleepy

\_\_\_\_\_ Have Indigestion

\_\_\_\_\_ Have a Cold

\_\_\_\_\_ Physically tired

\_\_\_\_\_ Mentally Fatigued

\_\_\_\_\_ Headache

\_\_\_\_\_ Stuffy (too much food)

\_\_\_\_\_ Nervous

\_\_\_\_\_ Other ailments (specify) \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Note: All information on this questionnaire will be held strictly confidential and will be available in coded form only.

Fig. 17. Personal conditions form.

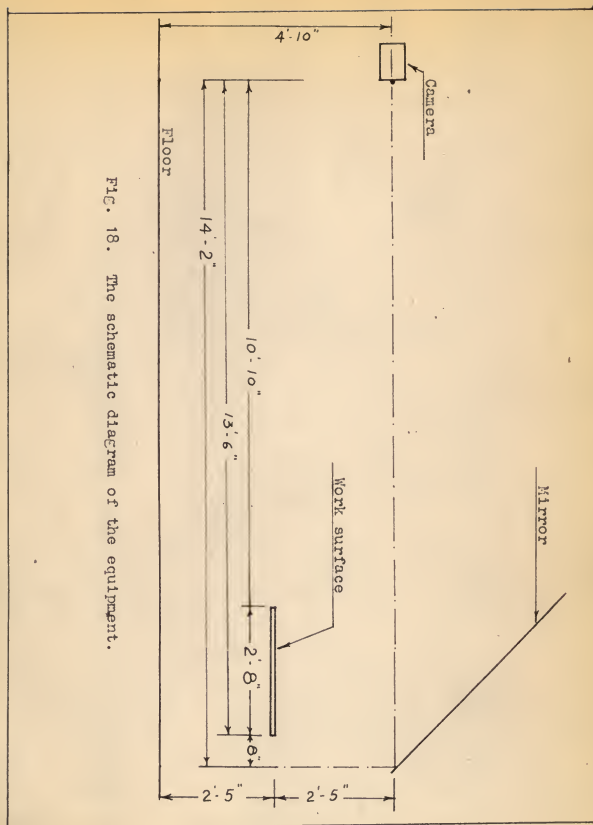


FIG. 18. The schematic diagram of the equipment.

was made to combine these summaries into one table and condensed summaries into another table to see whether some special characteristics was present. The combined summaries did not give any better result, so, it is not included in the thesis.

## APPENDIX B

# Computer Program for Control Chart Limits

This program calculated the upper and lower limits of  $\bar{X}$  and R charts. The Input and Output for this program were in the form of floating point numbers. For this program the IBM 650 computer and EOAP language were used. The input to the program consisted of the following seven words:

Word 1	1 to 10	$\bar{X}$
Word 2	11 to 20	$\bar{X}$
Word 3	21 to 30	$\sigma X$
Word 4	31 to 40	R
Word 5	41 to 50	$D_2$
Word 6	51 to 60	$D_4$
Word 7	61 to 70	A

Since one data card gave full data to calculate the required limits for  $\bar{X}$  and R charts for one motion, it was not necessary to store any data. Each card was read and the answer was punched out before the next card was read in.

The program was as follows:

1        CALCULATE CONTROL LIMITS

1

	REG	FO027	0036	PUNCH AREA
	REG	R1951	1960	READ AREA
START	RCD	1951		READ CARD
	LDD	RO001		TRANSFER
	STD	PO002		X BAR
	LLD	RO004		TRANSFER
	STD	PO005		R
	RAU	RO007		BRING A



FMP	R0003	A SIGMA XP
STU	R0007	SIGA
FAD	R0002	UCL X
STU	P0001	STOR UCL X
RAU	R0002	X 2 BAR
FSB	R0007	LCL X
STU	P0003	STOR LCL X
RAU	R0005	D2
FMP	R0003	UCL R
STU	P0004	STOR UCL R
RAU	R0006	D 1
FMP	R0003	LCL R
STU	P0006	STOR LCL R
PCH	P0001	START PUNCH CARD

Output was also in floating point and consisted as follows:

Word 1	1 to 10	Upper Limit for $\bar{X}$ Chart.
Word 2	11 to 20	$\bar{X}$
Word 3	21 to 30	Lower Limit for $\bar{X}$ Chart.
Word 4	31 to 40	Upper Limit for R Chart.
Word 5	41 to 50	R.
Word 6	51 to 60	Lower Limit for R Chart.

In the IBM 533, the General Purpose 80-80 Input-Output board was used. After getting the output from IBM 533, some changes were made before printing the results on the accounting machine. The first three words of the answer cards were transferred to other blank cards in the first thirty spaces. Then, a special code word was punched on each card to identify the motion. It was coded as follows:

Digits 31-32	indicates the operator number.
Digits 33-34	indicates the motion number.
Digit 35	indicates the Group number.
Digit 36	indicates the type of chart (1 indicates $\bar{X}$ chart) (2 indicates R chart)

Example: Suppose the code number is 110231

This means that these are the limits of the eleventh operator second motion in the third group for the  $\bar{X}$  chart.

In the same way the remaining three words for the R chart were also transferred to blank cards in the first thirty spaces and the code words were punched.

The last operation after printing the answers was to check the points which were out of control. All points which were out of control were marked.

All the answers for the control limits are printed and shown on the following pages.

8771196051 7620000051 7028804051 010111  
 \* 9642392051 9680000051 6157608051 020111  
 \* 1003372652 1029000052 5766274051 040111  
 8810430051 7320000051 6989570051 060111

8578472051 6010000051 5301528051 010211  
 \* 1021694452 1163000052 3663056051 020211  
 1095293252 1029000052 2927068051 040211  
 8652260051 8470000051 5227740051 060211

1439904652 1330000052 1140095452 010311  
 1589809252 1200000052 9901908051 020311  
 1657145152 1213000052 9228549051 040311  
 1446655552 1263000052 1133344552 060311

2428315052 2324000052 1947685052 010411  
 2668630052 1976000052 1707370052 020411  
 2776577552 1695000052 1599422552 040411  
 2439137552 2243000052 1936862552 060411

70711078051 5300000051 4848922051 010511  
 8182156051 5430000051 3737844051 020511  
 8681243051 7320000051 3238757051 040511  
 7121115051 6490000051 4798885051 060511

4165808051	3450000051	2974192051	010611
4761616051	3480000051	2378384051	020611
5029248051	3640000051	2110752051	040611
4192640051	3840000051	2947360051	060611
1022509852	9660000051	8054902051	010711
1131019652	7760000051	6969804051	020711
1179761352	9080000051	6482387051	040711
1027396552	8370000051	8006035051	060711
2297697052	2026000052	1770303052	010811
2561394052	2054000052	1506606052	020811
2679844552	2298000052	1388155552	040811
2309572552	2059000052	1758427552	060811
1078758652	1007000052	9192414051	010911
* 1158517252	1200000052	8394828051	020911
1194344152	1029000052	8036559051	040911
1082350552	9520000051	9156495051	060911
8503750051	5340000051	5256250051	011011
* 1012750052	1162000052	3632500051	021011
1085687552	1033000052	2903125051	041011
8576875051	7040000051	5183125051	061011

1333043252 1153000052 9949568051 0111111  
1502086452 9680000051 8259136051 0211111  
1578019252 1210000052 7499808051 0411111  
1340656052 1187000052 9873440051 0611111

1300244852 1111000052 8277552051 0112111  
1536489652 1046000052 5915104051 0212111  
1642608852 7320000051 4853912051 0412111  
1310884052 9820000051 8171160051 0612111

5625552051	26900000051	9295440050	010112
4384148051	22300000051		20112
3708116051	58000000050		40112
5567204051	43400000051	8168720050	060112
1058006452	40600000051	1748208051	010212
8245336051	48100000051		20212
6973912051	58000000050		40212
1047032852	94100000051	1536304051	060212
9679752051	40400000051	1599444051	010312
7543698051	57000000051		20312
6380466051	74000000050		40312
9579354051	52700000051	1405572051	060312
1551780052	86800000051	2564100051	010412
1209345052	21000000051		20412
1022865052	13900000051		40412
1535685052	10490000052	2253300051	060412
7174536051	31900000051	1185492051	010512
5591314051	12300000051		20512
4729138051	28700000051		40512
7100122051	27900000051	1041796051	060512

3847296051	12000000051	6357120050	010612
2998304051	22500000051		20612
2535968051	22000000050		40612
3807392051	27200000051	5586560050	060612

7006776051	51200000051	1157772051	010712
5460574051	25200000051		20712
4618558051	66000000050		40712
6934102051	43400000051	1017436051	060712

1702764052	56400000051	2813580051	010812
1327011052	37500000051		20812
1122387052	34500000051		40812
1685103052	16420000052	2472540051	060812

5150232051	11600000051	8510040050	010912
4013718051	33300000051		20912
3394806051	58000000050		40912
5096814051	26800000051	7478520050	060912

1048500052	88600000051	1732500051	011012
8171250051	27000000050		21012
6911250051	18400000051		41012
1037625052	94900000051	1522500051	061012



1091558452	51100000051	1803648051	0111112
8506816051	47400000051		21112
7195072051	16900000051		41112
1080236852	61500000051	1585024051	061112

1525497652	10080000052	2520672051	011212
1188862452	35900000051		21212
1005540852	28700000051		41212
1509675252	10000000052	2215136051	061212

9147000051	7540000051	7253000051	010121
* 9098703051	9610000051	7301297051	020121
9360075051	9300000051	7039925051	030121
9020102051	8920000051	7379898051	040121
9204767051	7380000051	7195233051	050121
* 9360075051	6010000051	7039925051	060121
9470874051	7880000051	6929126051	070121
9098703051	7480000051	7301297051	090121
9147000051	8730000051	7253000051	100121
9840204051	8330000051	6559796051	110121

8641000051	5670000051	4539000051	010221
8536399051	8270000051	4643601051	020221
* 9102475051	3940000051	4077525051	030221
* 8366166051	8950000051	4813834051	040221
8766111051	4540000051	4413889051	050221
9102475051	8190000051	4077525051	060221
9342442051	9100000051	3837558051	070221
8536399051	6240000051	4643601051	090221
* 8641000051	3070000051	4539000051	100221
1014233252	9330000051	3037668051	110221

1460900052	1213000052	1001100052	010321
1449175152	1232000052	1012824952	020321
1512627552	1456000052	9493725051	030321
1430093452	1163000052	1031906652	040321
1474923952	1233000052	9870761051	050321
1512627552	1130000052	9493725051	060321
1539525852	1038000052	9224742051	070321
1449175152	1180000052	1012824952	090321
1460900052	1432000052	1001100052	100321
1629186852	1200000052	8328132051	110321

2442500052	2354000052	1689500052	010421
2423298552	2105000052	1708701552	020421
2527212552	1943000052	1604787552	030421
2392049052	2044000052	1739951052	040421
2465466552	2098000052	1666533552	050421
* 2527212552	2540000052	1604787552	060421
2571263052	1847000052	1560737052	070421
2423298552	2012000052	1708701552	090421
2442500052	1859000052	1689500052	100421
2718098052	1533000052	1413902052	110421

7812000051	5660000051	3488000051	010521
7701738051	5170000051	3598262051	020521
8298450051	4850000051	3001550051	030521
7522292051	5820000051	3777708051	040521
7943882051	4770000051	3356118051	050521
8298450051	4930000051	3001550051	060521
8551404051	6430000051	2748596051	070521
7701738051	5940000051	3598262051	090521
7812000051	6730000051	3488000051	100521
9394584051	6330000051	1905416051	110521
3912000051	3300000051	2748000051	010621
3882318051	2860000051	2777682051	020621
4042950051	2930000051	2617050051	030621
3834012051	3390000051	2825988051	040621
3947502051	3380000051	2712498051	050621
4042950051	3270000051	2617050051	060621
4111044051	3940000051	2548956051	070621
3882318051	3180000051	2777682051	090621
3912000051	3660000051	2748000051	100621
4338024051	4000000051	2321976051	110621

1186700052	9430000051	7953000051	010721
1176719352	9780000051	8052807051	020721
1230732552	1068000052	7512675051	030721
1160476252	1062000052	8215238051	040721
1198637752	8300000051	7833623051	050721
1230732552	7960000051	7512675051	060721
1253629452	1162000052	7283706051	070721
1176719352	9120000051	8052807051	090721
* 1186700052	1202000052	7953000051	100721
1329952452	9000000051	6520476051	110721

2616000052	2090000052	1686000052	010821
2592285052	2033000052	1709715052	020821
2720625052	2068000052	1581375052	030821
2553690052	2257000052	1748310052	040821
2644365052	2388000052	1657635052	050821
2720625052	2546000052	1581375052	060821
2775030052	2051000052	1526970052	070821
2592285052	2214000052	1709715052	090821
2616000052	1873000052	1686000052	100821
2956380052	1833000052	1345620052	110821

* 1045400052	10500000052	81260000051	010921
1039463652	10250000052	8185364051	020921
1071590052	96700000051	7864100051	030921
1029802452	92700000051	8281976051	040921
* 1052500452	80300000051	8054996051	050921
1071590052	89300000051	7864100051	060921
1085208852	87200000051	7727912051	070921
* 1039463652	81000000051	8185364051	090921
1045400052	98000000051	81260000051	100921
1130604852	93300000051	7273952051	110921
* 92060000051	49400000051	53340000051	011021
* 9107264051	98500000051	5432736051	021021
* 8946576051	10200000052	5593424051	031021
9641600051	86300000051	4898400051	041021
9324096051	55700000051	5215904051	051021
9641600051	67700000051	4898400051	061021
9868112051	78700000051	4671888051	071021
9107264051	64600000051	5432736051	091021
* 92060000051	42600000051	53340000051	101021
1062315252	76700000051	3916848051	111021

1210700052	9900000051	8973000051	011121
1202708352	1012000052	9052917051	021121
1245957552	9510000051	8620425051	031121
1189702252	1001000052	9182978051	041121
1220258752	1075000052	8877413051	051121
1245957552	9810000051	8620425051	061121
1264291452	1078000052	8437086051	071121
1202708352	1097000052	9052917051	091121
1210700052	1207000052	8973000051	101121
1325404452	1267000052	7825956051	111121
1454300052	1190000052	9077000051	011221
1440361752	1055000052	9216383051	021221
1515792552	1364000052	8462075051	031221
*1417677852	7640000051	9443222051	041221
1470971352	1429000052	8910287051	051221
*1515792552	7470000051	8462075051	061221
1547768652	1161000052	8142314051	071221
1440361752	1394000052	9216383051	091221
1454300052	1405000052	9077000051	101221
*1654355652	1733000052	7076444051	111221



5108118051	12800000051	5170620050	010122
5179143051	31500000051	6505890050	020122
4808866051	26200000051		30122
5295624051	19200000051	8750280050	040122
5025729051	21200000051	3664890050	050122
4808866051	34200000051		60122
4657346051	31600000051		70122
5179143051	29700000051	6505890050	090122
5108118051	40900000051	5170620050	100122
4127026051	10000000051		110122

1106309452	46600000051	1119846051	010222
1121691952	92600000051	1409037051	020222
1041497852	38400000051		30222
1146919252	53200000051	1895124051	040222
1088465752	30600000051	7937370050	050222
1041497852	43200000051		60222
1008681852	46400000051		70222
1121691952	61600000051	1409037051	090222
1106309452	20600000051	1119846051	100222
* 8938258051	90000000051		110222

1240080652	4440000051	1255254051	010322
*1257323152	1355000052	1579413051	020322
1167432252	5780000051		30322
1285600852	6470000051	2124276051	040322
1220079352	9190000051	8897130050	050322
1167432252	6660000051		60322
1130648252	3490000051		70322
1257323152	5570000051	1579413051	090322
1240080652	5610000051	1255254051	100322
1001904252	3000000051		110322

2030841052	1333000052	2055690051	010422
2059078552	1282000052	2586555051	020422
1911867052	6800000051		30422
2105388052	1235000052	3478860051	040422
1998085552	9930000051	1457055051	050422
1911867052	1394000052		60422
1851627052	4160000051		70422
2059078552	1163000052	2586555051	090422
2030841052	1402000052	2055690051	100422
1640787052	6000000051		110422

1166182852	43000000051	1180452051	010522
1182397852	29900000051	1485294051	020522
1097863652	15600000051		30522
1208990452	37400000051	1997688051	040522
1147373452	18200000051	8366940050	050522
1097863652	34900000051		60522
1063271652	13600000051		70522
1182397852	38800000051	1485294051	090522
1166182852	30400000051	1180452051	100522
9421996051	30000000051		110522

3139308051	11500000051	177720050	010622
3182958051	21900000051	3998340050	020622
2955396051	20400000051		30622
3254544051	21900000051	5377680050	040622
3088674051	24000000051	2252340050	050622
2955396051	21700000051		60622
2862276051	10900000051		70622
3182958051	11200000051	3998340050	090622
3139308051	21200000051	3177720050	100622
2536356051			110622

1055605852	7350000051	1068522051	010722
1070283352	9160000051	1344459051	020722
9937646051	6470000051		30722
1094354452	6730000051	1808268051	040722
1038579952	3230000051	7573590050	050722
9937646051	5190000051		60722
9624526051	2620000051		70722
1070283352	5210000051	1344459051	090722
1055605852	5100000051	1068522051	100722
8528606051	3000000051		110722

2508210052	2272000052	2538900051	010822
2543085052	1398000052	3194550051	020822
2361270052	1300000052		30822
2600280052	1138000052	4296600051	040822
2467755052	1683000052	1799550051	050822
2361270052	1888000052		60822
2286870052	4260000051		70822
2543085052	7990000051	3194550051	090822
2508210052	9330000051	2538900051	100822
2026470052	8000000051		110822

6278616051	5550000051	6355440050	010922
6365916051	3490000051	7996680050	020922
5910792051	1750000051		30922
6509088051	2360000051	1075536051	040922
6177348051	1750000051	4504680050	050922
5910792051	5160000051		60922
5724552051	2410000051		70922
6365916051	3150000051	7996680050	090922
6278616051	2180000051	6355440050	100922
5072712051	3000000051		110922

1044278452	7100000051	1057056051	011022
1058798452	7420000051	1330032051	021022
1082611252	1069000052	1788864051	031022
9831008051	4110000051		41022
1027435252	3280000051	7492320050	051022
9831008051	7110000051		61022
9521248051	3120000051		71022
1058798452	4130000051	1330032051	091022
1044278452	3650000051	1057056051	101022
8437088051	3000000051		111022

8452398051	3410000051	8555820050	011122
8569923051	5000000051	1076529051	021122
7957226051	4000000051		31122
8762664051	5550000051	1447908051	041122
8316069051	6890000051	6064290050	051122
7957226051	5160000051		61122
7706506051	1040000051		71122
8569923051	4080000051	1076529051	091122
8452398051	3030000051	8555820050	101122
6828986051	4000000051		111122
* 1474180252	1542000052	1492218051	011222
1494677752	5770000051	1877571051	021222
1387817452	5340000051		31222
1528293652	9510000051	2525292051	041222
1450403152	9710000051	1057671051	051222
1387817452	8030000051		61222
1344089452	4160000051		71222
1494677752	4980000051	1877571051	091222
1474180252	6790000051	1492218051	101222
1191041452	5000000051		111222

1053058052	8950000051	5109420051	020131
9920230051	9350000051	5719770051	030131
1016750052	6500000051	5472500051	050131
9594710051	7350000051	6045290051	070131
1113936552	6670000051	4500635051	090131
1053058052	6840000051	5109420051	100131
9480465051	8210000051	6159535051	110131

* 1081788452	1181000052	3242116051	020231
9964954051	6660000051	4095046051	030231
1031050052	5510000051	3749500051	050231
9510058051	7900000051	4549942051	070231
1166862752	7620000051	2391373051	090231
1081788452	3900000051	3242116051	100231
9350407051	6580000051	4709593051	110231

1374113652	9900000051	8378864051	020331
1313741652	1140000052	8982584051	030331
1338200052	9860000051	8738000051	050331
1281543252	1068000052	9304568051	070331
1434330852	1333000052	7776692051	090331
1374113652	1237000052	8378864051	100331
1270242852	1064000052	9417572051	110331



2353322052	2233000052	1284678052	020431
2233007052	2029000052	1404993052	030431
2281750052	2266000052	1356250052	050431
2168839052	2085000052	1469161052	070431
2473328552	1571000052	1164671552	090431
2353322052	1661000052	1284678052	100431
2146318552	1771000052	1491681552	110431

6812428051	4470000051	3767572051	020531
*6469618051	3980000051	4110382051	030531
6608500051	4340000051	3971500051	050531
6286786051	6150000051	4293214051	070531
7154359051	4760000051	3425641051	090531
6812428051	6500000051	3767572051	100531
6222619051	5900000051	4357381051	110531

3937796051	2560000051	2022204051	020631
3722126051	2660000051	2237874051	030631
3809500051	3370000051	2150500051	050631
3607102051	2680000051	2352898051	070631
4152913051	3340000051	1807087051	090631
3937796051	3250000051	2022204051	100631
3566733051	3240000051	2393267051	110631

1173490052	8620000051	7145100051	020731
1121815052	8730000051	7661850051	030731
1142750052	8600000051	7452500051	050731
1094255052	1056000052	7937450051	070731
1225032552	9050000051	6629675051	090731
1173490052	1010000052	7145100051	100731
1084582552	9480000051	8034175051	110731

3260887652	2363000052	1791112452	020831
3095410652	2465000052	1956589452	030831
3162450052	3074000052	1889550052	050831
3007156252	2320000052	2044843852	070831
3425940352	2761000052	1626059752	090831
3260887652	2897000052	1791112452	100831
2976182352	2258000052	2075817752	110831

1132927652	1023000052	6330724051	020931
1076650652	9330000051	6893494051	030931
1099450052	8170000051	6665500051	050931
1046636252	8990000051	7193638051	070931
1189060352	7620000051	5769397051	090931
1132927652	8140000051	6330724051	100931
1036102352	8780000051	7298977051	110931

* 1060070052	11810000052	3759300051	021031
9830450051	91400000051	4529550051	031031
1014250052	50400000051	4217500051	051031
9419650051	71900000051	4940350051	071031
1136897552	71400000051	2991025051	091031
1060070052	42200000051	3759300051	101031
9275475051	61300000051	5084525051	111031
1161898452	86300000051	6901016051	021131
1108780452	89400000051	7432196051	031131
1130300052	86600000051	7217000051	051131
1080450852	97500000051	7715492051	071131
* 1214880252	12860000052	63711198051	091131
1161898452	10740000052	6901016051	101131
1070508252	10530000052	7814918051	111131
15800000052	76600000051	71400000051	021231
14825000052	12230000052	81150000051	031231
15220000052	83900000051	77200000051	051231
14305000052	10560000052	86350000051	071231
16772500052	11900000052	61675000051	091231
15800000052	11400000052	71400000051	101231
* 14122500052	15520000052	88175000051	111231

6820270051	4000000051		20132
7696670051	4980000051		30132
7352370051	2470000051		50132
8142695051	1100000051	3208250050	070132
5768590051	1910000051		90132
6820270051	1940000051		100132
8305455051	5710000051	6056550050	110132
9530946051	6660000051		20232
1075566652	5640000051		30232
1027452652	2830000051		50232
1137896152	3330000051	4483350050	070232
8061282051	3810000051		90232
9530946051	1880000051		100232
1160640952	5280000051	8463690050	110232
6746184051	2100000051		20332
7613064051	2110000051		30332
7272504051	2710000051		50332
*8054244051	9920000051	3173400050	070332
5705928051	1900000051		90332
6746184051	1940000051		100332
8215236051	2480000051	5990760050	110332

1344443052	6300000051		20432
1517203052	7840000051		30432
1449333052	1163000052		50432
1605125552	5550000051	6324250050	070432
1137131052	2860000051		90432
1344443052	2300000051		100432
1637209552	8260000051	1193895051	110432
3830682051	1040000051		20532
4322922051	1790000051		30532
4129542051	3030000051		50532
4573437051	1920000051	1801950050	070532
3239994051	50		90532
3830682051	3780000051		100532
4664853051	1010000051	3401730050	110532
2409974051	1010000051		20632
2719654051	1070000051		30632
2597994051	1230000051		50632
2877259051	1060000051	1133650050	070632
2038358051	9500000050		90632
2409974051	9700000050		100632
2934771051	1170000051	2140110050	110632

5774350051	19000000051		20732
6516350051	35400000051		30732
6224850051	22400000051		50732
6893975051	37000000051	2716250050	070732
4883950051	95000000050		90732
5774350051	21600000051		100732
7031775051	58400000051	5127750050	110732
1849099452	28500000051		20832
2086707452	15580000052		30832
1993361452	12440000052		50832
2207632952	80000000051	8698150050	070832
1563969852	57100000051		90832
1849099452	39000000050		100832
2251760152	19990000052	1642041051	110832
6288594051	21200000051		20932
7096674051	49100000051		30932
6779214051	16400000051		50932
7507929051	44800000051	2958150050	070932
5318898051	19100000051		90932
6288594051	21200000051		100932
7658001051	38100000051	5584410050	110932

8607050051	4760000051	21032
9713050051	3490000051	31032
9278550051	2830000051	51032
1027592552	6430000051	4048750050
7279850051	2860000051	071032
8607050051	2850000051	91032
1048132552	4370000051	101032
	7643250050	111032

5935596051	2080000051	21132
6698316051	3070000051	31132
6398676051	2630000051	51132
7086486051	5260000051	2792100050
5020332051	9500000050	071132
5935596051	2910000051	91132
7228134051	3410000051	101132
	5270940050	111132
1089500052	1780000051	21232
1229500052	9670000051	31232
1174500052	4080000051	51232
1300750052	4200000051	5125000050
9215000051	2860000051	071232
1089500052	3170000051	91232
1326750052	1238000052	101232
	9675000050	111232



SOME WORK CYCLE CHARACTERISTICS OF A  
SIMPLE, HIGH RATE, FORCED-PACE  
ASSEMBLY OPERATION

by

SANAT NATWARLAL PARIKH

D. M. E., Maharaja Sayajirao University of Baroda  
Baroda, India, 1955

D. E. E., Maharaja Sayajirao University of Baroda  
Baroda, India, 1956

---

AN ABSTRACT OF A MASTER'S THESIS

submitted in partial fulfillment of the  
requirements for the degree

MASTER OF SCIENCE

Department of Industrial Engineering

KANSAS STATE UNIVERSITY  
Manhattan, Kansas

1962

The purpose of this thesis was to study the characteristics of some work cycles in a simple, high rate, forced-pace assembly operation. The data obtained from micromotion films, were analyzed by using statistical and graphical methods. Certain conclusions regarding the source of variability present in the work cycles and the possible causes of this variability were drawn. The writer feels that the implications found from this project are just and valid.

By comparing and combining the experimental conclusions of the project, certain general conclusions were drawn as follows:

(1) One of the conclusions of this project was the large amount of variability that was present in the time values of different motions and even in the percentages of these times based on total cycle time. It was found that the operators produced variable over-all cycle times consisting of variable times for motions within the cycles.

As this study was carried out for only one type of assembly work, these conclusions should not be interpreted as necessarily being true for other types of assembly work. Because of these limitations of this project, it was felt that the conclusions do not prove the hypercritical feelings that have appeared in most Time and Motion Study books regarding the reliability of pre-determined time standards.

(2) Next, it was realized that each operator produced the over-all cycle time and the component motion time in his own way which was usually different from the other operators. Some operators were producing the assemblies in such a way that there was not a single reading in Group I, while some were following a different pattern and they did not have any reading in Group III. This was the reason why the data were divided into two parts while analyzing for analysis of variance.

(3) It was noted that one of the principle causes of cycle variability was speed with which some of the operators worked. The assembly motions were the most variable of the motions and also accounted for the largest percentage of the total cycle time. So, it appears that the most significant motion to be considered for improving the over-all cycle time would be the assembly motion.

(4) In all general cases the path of travel during the motion 3R, 7R, and 3L was a straight line or slightly curved, but, during motion 7R, an interesting path was noted for some operators. When the grasping of the third part and rising of the obstruction took place at the same time, some operators were afraid of the pacer. As a result of this, the path was distorted. In such cases, instead of straight travel, the hand went straight upward and then the operator tried to bring it back for assembly operation. Even though the pacer was safe, and this was known to all operators, they changed the usual path unconsciously.